RGB MOODLIGHT
Quintezz® LED

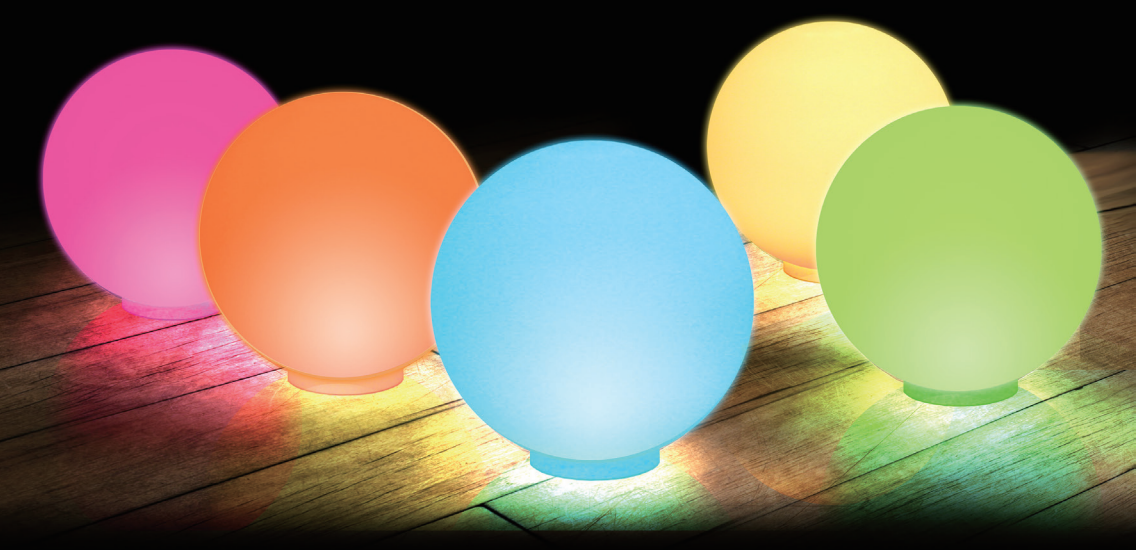

User's Manual

20 CM

GB NL FR D PL

DECLARATION OF CONFORMITY

Hereby,

Company:	TE-GROUP nv
Address:	Kapelsestraat 61, 2950 Kapellen - BELGIUM

declare, that the following equipment:

Product Name:	Quintezz RGB Moodlight 20 cm
Product Type:	RGB LED Moodlight

The above mentioned product complies with the essential requirements, which are specified in the directive 2004/108/EC and 2006/95/EC on the approximation of the laws on the Member States relating to electromagnetic compatibility.

This product has been tested against following standards and specifications, applying versions valid on December 2014:
EN55015
EN61547
EN61000
EN61347

CE

Joseph Van Oosterum, CEO TE-Group NV

---------- Manual/RGB Moodlight 20 cm/11-14/V02 ----------
Copyright © Quintezz®

ILLUSTRATION 1

ILLUSTRATION 2

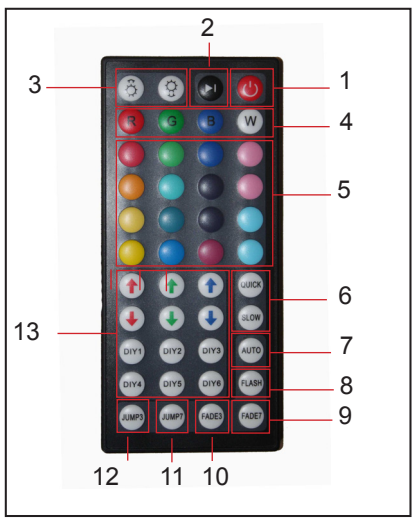

ILLUSTRATION 3

GB

PACKAGE CONTENTS
The Quintezz RGB Moodlight consists of:
* RGB Moodlight
* RGB Infrared advanced remote control
* 230V DC adapter

FEATURES & INSTALLATION TIPS
- Can only be used only indoor as home decoration
- Energy-saving, and environmental production
- Safe and reliable, protected against high temperatures and explosion resistant
- Long life span, with high brightness RGB LED's
- The remote control, adapter and RGB Moodlight are NOT waterproof. Please keep away from water.

POWER INSTRUCTIONS
See illustration 1
Connect the adapter with the RGB Moodlight input socket and plug into an outlet with an input voltage of 110V-240V AC.

DESCRIPTION OF THE REMOTE CONTROL
See illustration 2
1. ON/OFF: Turn the RGB Moodlight ON/OFF
2. Play/Pause: Play/Pause the chosen light effect
3. DIM-buttons: Brighten or darken the chosen color
4. Main colors: Red, green, blue and white
5. Predefined colors: Change the main colors
6. QUICK/SLOW: Adjust the speed of the chosen light effect
7. AUTO: All available light effects are shown one by one
8. FLASH: The RGB Moodlight will flash in white color (#)(*)
9. FADE 7: 7 colors of the RGB Moodlight will slowly change, from one color shade to another, without flashing (#)
10. FADE 3: 3 RGB colors will slowly change, from one color shade to another, without flashing (#)
11. JUMP 7: 7 colors of the RGB Moodlight will change quickly (#)(*)
12. JUMP 3: The RGB Moodlight changes into 3 RGB colors quickly (#)(*)

(#) The speed of all these light effects can be adjusted using the Quick/Slow buttons (6).
(*) The brightness of all these light effects can be adjusted using the DIM buttons (3).

13. DIY buttons and Arrow buttons: There are 3 groups of "up" and "down" arrow buttons for Red/Green/Blue colors and 6 DIY color setting buttons. The DIY color setting buttons can be used to store your favorite color effects. Press a DIY button, for example DIY 1, to enter the DIY color mode. You can now adjust the brightness of the Red/Green/Blue color using the 6 arrow buttons until you have created your desired light effect. Press the DIY1 button again to store the selected light effect. The next time this button is pressed, it will display the color which you saved the last time. There are 6 DIY buttons, so you can save your favorite 6 colors/brightnesses.

Note:
- If another button is pressed during the color setting process, the selected light effect will not be saved!
- All DIY buttons are independent. For example: if you press DIY 1 button first and then press DIY 2 button, DIY 1 button will be invalid until DIY 2 button will be pressed again and the current color will be saved.

BATTERY COMPARTMENT AT THE BOTTOM
See Illustration 3
Insert 3x AAA 1.5V Alkaline batteries to use the RGB Moodlight anywhere you want.

Note: Do NOT plug in the wall adapter when using the RGB Moodlight on batteries.

SAFETY INSTRUCTIONS
- Never open the RGB Moodlight or the wall adapter.
- Never touch the plug contacts with sharp or metal objects.
- Make sure that cables cannot cause a trip hazard.
- Use only the original power supply and original accessories.
- Never place the device in the vicinity of heat sources.
- Never place the unit on surfaces that are heat sensitive.
- Protect the device from special liquids and vapors.
- Unplug the unit at the main power socket before cleaning. Do not use any solvent based cleaning agents, only a soft, dry anti-static cloth.
- Do not attempt repairs yourself.
- If the unit is not properly installed or operated Quintezz® cannot accept liability.

TECHNICAL DATA
- Operating voltage: 110-240V AC, 50/60 Hz
- Power supply: Euro
- Power consumption: max 5 watts
- Ambient operating temperature: -10 ~ 40 °C
- Humidity: 10% - 85% (none condensing)
- Storage temperature: -10 ~ 50 °C
- Storage humidity: 5% - 90% (none condensing)
- Protection class: *RGB Moodlight*: only for indoor use, *Adapter*: only for indoor use

RGB Moodlight:
LED RGB
DC 5V, 1A, 5W
8x LEDs, 1,1W total
Max. 70 lumen
180° light angle
360° view angle
Dimensions: ø 200 mm

Remote:
20 color buttons + 6 different color-light programs + DIM/faster/slower function + Pause + Auto + 6 programmable DIY buttons + 6 "mix" buttons (arrow buttons).
Battery: CR 2025

Adapter:
Input: 100-240V
Output: 5V / 1A (IC protector)

SUPPORT
For more information, technical questions and return requests concerning this product, you should contact :
support@quintezz.com.

GUARANTEE
Copyright © Quintezz®. Quintezz® is a registered trademark of TE-Group NV. The Quintezz® brand stands for superior product quality and outstanding customer service. That is why Quintezz® warrants this product against all defects in material and workmanship for a period of **two (2) years** from the date of original purchase of the product. The terms of this guarantee and the extent of responsibility of Quintezz® under this warranty can be downloaded from the website: www.quintezz.com.